
Issuer's name/ producer: KAVALIERGLASS, a.s.

Issuer's address/Producer: Křížová 1018/6, Prague 5

office: Sklářská 359, 285 06 Sázava, Czech Republic

Object of the declaration: Cylinders graduated with hexagonal base and pourout, high form, white graduation, class B

Product IDN & Description	<u>Catalog No.</u>	Capacity/ ml
1634/BB/class B	1632432140718	5
	1632432140819	10
	1632432140923	25
	1632432141125	50
	1632432141130	100
	1632432141238	250
	1632432141343	500
	1632432141444	1000
	1632432141546	2000

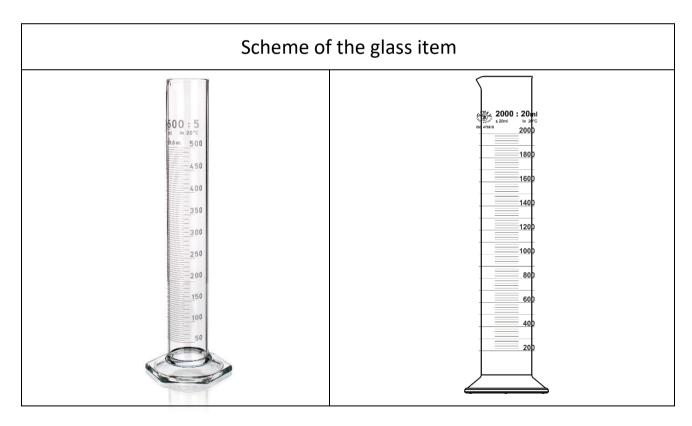

Material specification:					
Cylinder graduated	clear	Borosilicate glass SIMAX®			
Print on the body of the cylinder	white in fired-on, chemically resistant ceramic en				
Purpose of use	laboratory volumetric glassware				

The object of the certificate described above is in conformity with the requirements of the following standards and regulations:

Glass characteristics:

- ISO 3585 Borosilicate glass 3.3 Properties.
 - Chemical durability (art. 4.1, 4.2, 4.3, 4.4)
 - Physical properties (art. 5.1, 5.2, 5.3, 5.4, 5.5, 5.6)
- ISO 4788 Laboratory glassware Graduated measuring cylinders
 - Maximum permissible errors in capacity fulfill the values specified in Table 1/ISO 4788. These errors represent the maximum permissible error at any point on the scale.

Table 1 - ISO 4788

Nominal capacity ml		5	10	25	50	100	250	500	1000	2000
Max. permissible error ±ml	Class B	0,1	0,2	0,5	1,0	1,0	2,0	5,0	10,0	20,0

No heavy metals (lead, cadmium, mercury and hexavalent chromium):

• Regulation (EC) No. 987/2008 of 8 October 2008 amending Regulation (EC) No. 1907/2006 – REACH as regards Annexes IV and V – glass was exempted from the obligation to register.

Chemical characteristics (acc. to Regulation No 1907/2006/EC):

Composition: CAS No. EINECS No. Component: Concentration / Percent:

65997-17-3 266-046-0 Glass, oxide, chemicals 100%

Characteristics of Borosilicate glass SIMAX®

Acid resistance Class I.
 ISO 1776

• **Hydrolytic resistance** Class I. HGB1 to ISO 719;

HGA1 to ISO 720

• Alkali resistance Class II. ISO 695

Coefficient of mean linear thermal expansion α: 3,3 x10⁻⁶ K⁻¹ ISO 7991; (20/300 °C)

Additional information:

The producer confirms hereby that the characteristics, measures and accuracy of the products listed above are in full conformity with the provisions of the standard.

The producer also declares that the products are safe when used in usual and proper way.

The producer has installed the Quality Assurance System according to ISO 9001 and thus guarantees that all products delivered to the market are in full conformity with the technical documentation and with all fundamental requirements to such products.

Certificate No. 04 100 940602 issued by TÜV CERT, Certification Body at TÜV NORD CERT GmbH.

The certificate is issued for the customer: -

Sázava, 29. 01. 2021 Place and date of issue Ing. Kristýna Machová Project Quality Engineer

